


REVISIONS			
Z'NE	LTR	DESCRIPTION	DATE
A		ADDED 314 EXT PWR BP	6-27-79
B		REVISED TO SHOW FOR 240/416V 3-PH-4-WIRE, ADDED NOTE	8-10-79

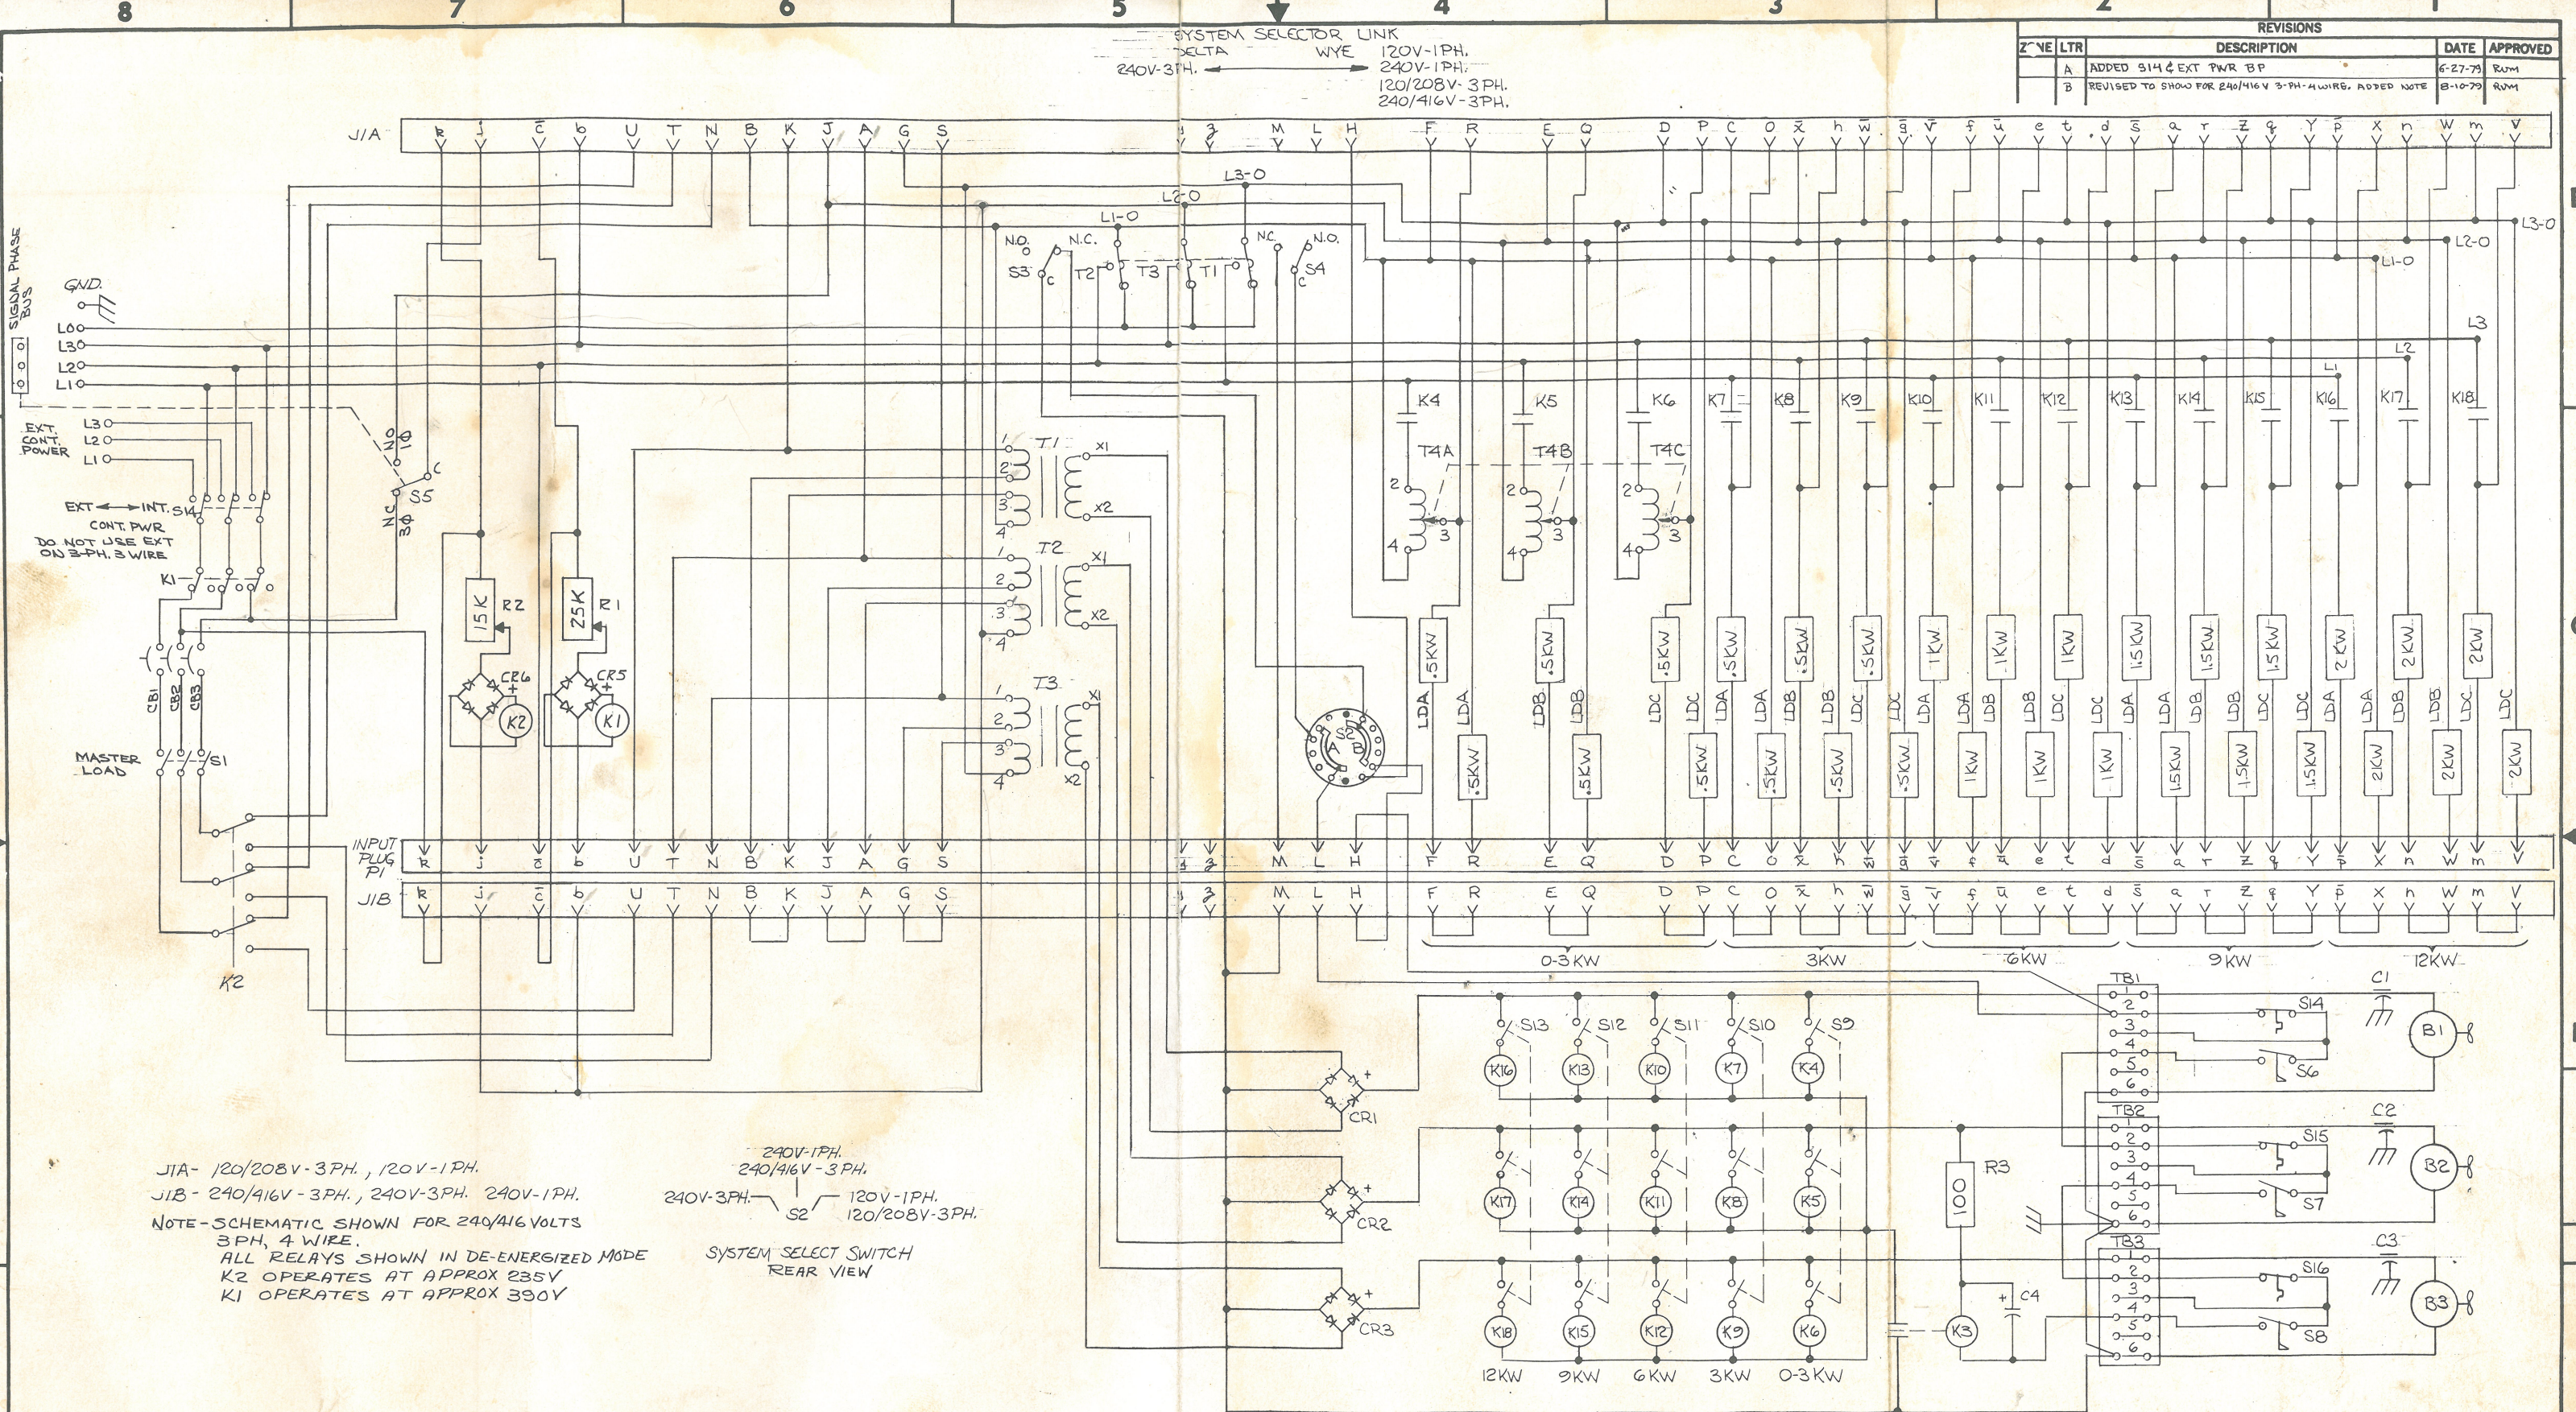

J1A- 120/208V-3PH, 120V-1PH.  
 J1B- 240/416V-3PH, 240V-3PH. 240V-1PH.  
 NOTE-SCHEMATIC SHOWN FOR 240/416 VOLTS  
 3PH, 4 WIRE.  
 ALL RELAYS SHOWN IN DE-ENERGIZED MODE  
 K2 OPERATES AT APPROX 235V  
 K1 OPERATES AT APPROX 330V

240V-1PH.  
 240/416V-3PH.  
 240V-3PH. 120V-1PH.  
 120/208V-3PH.

SYSTEM SELECT SWITCH  
 REAR VIEW

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DRAWN BY DA DATE 11/20/78	
FRACTIONS		CHECKED BY DATE	
DECIMALS		APPROVED DATE	
ANGLES		APPROVED DATE	
MATERIAL			
7478			
NEXT ASSY USED ON			
APPLICATION			

UMC ELECTRONICS CO. 460 SACKETT POINT ROAD NORTH HAVEN, CONN. 06473		
SCHEMATIC, ELECTRICAL LOAD BANK MODEL PLB TYPE 33		
SIZE	CODE IDENT	DWG. NO.
D	22680	23770
SCALE	WEIGHT	SHEET